

STRAPPING AND SEALS MANUFACTURED

ALUMINUM STRAPPING: Aluminum Strapping is manufactured from high quality aluminum alloy conforming to ASTM B-209 designation. It is .020" in thickness to allow for maximum tensioning. Aluminum strapping is available in 1/2" and 3/4" widths. Aluminum strapping is to be used where maximum tension or severe corrosion resistance is not required.

STAINLESS STEEL STRAPPING: Stainless Steel Strapping is manufactured from T-304 stainless steel in a special soft annealed temper to facilitate handling. It is available in 1/2" and 3/4" widths and in .015" and .020" thickness. Blue painted 1/2" width, .020" thickness is available when a need exists to identify underlying asbestos free insulation. Stainless steel strapping offers the greatest strength and corrosion resistance. T-316 Stainless Steel available upon request.

ALUMINUM BUTT STRAP: ITW's Aluminum Butt Strap is used to seal circumferencial joints of aluminum jacketing on insulated piping. It is manufactured from aluminum alloy conforming to ASTM B-209 designation. It is available in .020" thickness, 2" widths and 100' lengths.

STAINLESS STEEL BUTT STRAP: ITW's Stainless Steel Butt Strap is used to seal circumferencial joints of stainless steel jacketing on insulated piping. It is manufactured from T-304 stainless steel and is available in .010" thickness, 2" width and 100' lengths.

Oficina principal

Calle 46N° 71-121

PBX: (574) 274 4149

Email: info@calorcol.com

Copacabana - Antioquía - Colombia

Centros de distribución**Bogotá:** Cra 97 N° 24C - 75 Bg 40 Fontibón PBX (571) 415 9302**Barranquilla:**

Cel. 316 5278492

Bucaramanga:

Cel. 316 2550568

Cali:

Cel. 316 5278486

Pereira:

Cel. 316 8751095

Exportaciones:exportaciones@calorcol.com**Línea nacional: 316 5272521**


EXPAND-R-STRAP: Expand-R-Strap has been discontinued. Mity-Springs are recommended as replacement.

ALUMINUM WING SEALS: Aluminum Wing Seals are manufactured from heavy duty hard temper aluminum conforming to ASTM B-209 designation. These seals are .032" aluminum to allow for maximum tensioning and binding power. They are available in 1/2" and 3/4" widths.

STAINLESS STEEL WING SEALS: Stainless Steel Wing Seals are manufactured from heavy duty T-304 annealed stainless steel. These seals are .032" in thickness to allow for maximum tensioning and binding power. They are available in 1/2", and 3/4" widths. T-316 available upon request.

(See Stainless Steel Closed Seals for diameters of 8' or more)

STAINLESS STEEL CLOSED SEALS: Stainless Steel Closed Seals are manufactured from heavy duty .024" T-304 hard temper stainless steel. They are available in 1/2" x 7/8" and 3/4" x 7/8" sizes. Closed seals are recommended in lieu of wing seals for use with strapping on tanks and/or vessels with diameters of 8' or more and when applying tensioning springs, since a much stronger closure results from the use of closed seals.

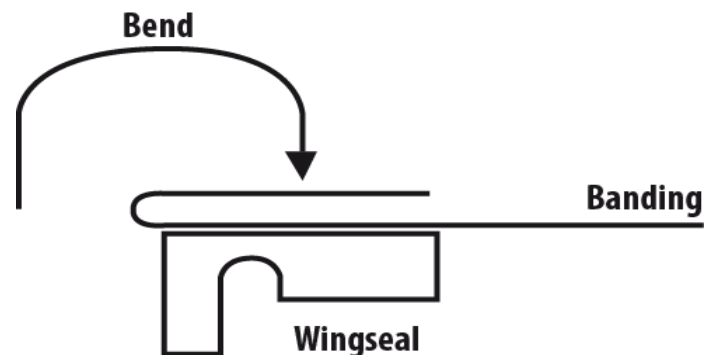

DISCLAIMER: Calorcol SAS provides this technical note about the product as a general guide. Calorcol assumes no responsibility in the misuse of the information contained in the note. Calorcol reserves the right to change the content of the note anytime without previous notice. For more information about this subject please contact the Calorcol Technical Assistance Department.

Oficina principal

Calle 46N° 71-121
PBX: (574) 274 4149
Email: info@calorcol.com
Copacabana - Antioquía - Colombia

Centros de distribución

Bogotá: Cra 97 N° 24C - 75 Bg 40 Fontibón PBX (571) 415 9302

Barranquilla:

Cel. 316 5278492

Bucaramanga:

Cel. 316 2550568

Cali:

Cel. 316 5278486

Pereira:

Cel. 316 8751095

Exportaciones:

exportaciones@calorcol.com

Línea nacional: 316 5272521